

Heat cutter HSG-0-EST

Description:

The powerful and comfortable hand operated tool with a microprocessor-controlled power level. Fast heating-up time thanks to the boost-function.

To cut small and medium quantities. Suitable to cut and seal the edges of synthetic fabric, such as cords, ropes, bands and belting fabric.

Boost-function:

In order to ensure a quick heating-up time, the cutting tip is operated at maximum power for a few seconds when it is switched on. The output is then regulated to the value set by the user.

Technical data:

Supply voltage: 230 V - 50 Hz
 Power input: Max. 200 W
 Operating time: Intermittent operation 1/4min.
 Protection class: II - Protective insulation
 Power supply: Supply cord 3 m, with European-type plug
 Weight: 0,58 kg
 with case and accessories 1,5kg
 Other: LED operation indicator
 Infinitely adjustable working temperature
 Ready to cut in 6 seconds
 Cutting temperature max. 650°C


















HSG-0-EST with cutting blade Typ R-50

Scope of delivery:






1x HSG-0-EST
 1x Cutting blade Typ R-50
 1x Screwdriver
 1x Cleaning brush
 1x Plastic case (also available without cutting blade, in cardboard packaging)
 1x Operating instructions with Declaration of Conformity

Possible cutting blades:



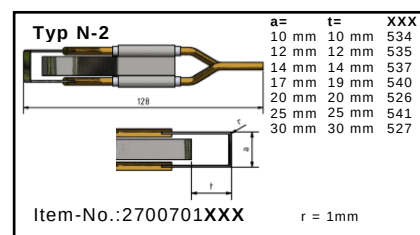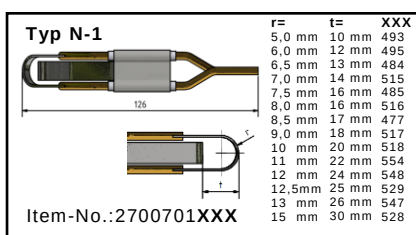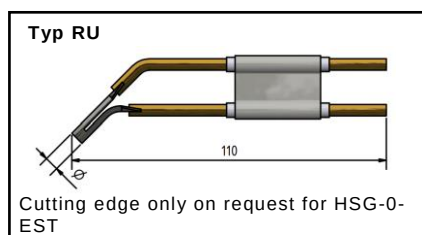

New cutting blades, without support plate:



Various cutting tips are available for a wide range of materials and applications. This data sheet shows only a small overview. Please inform us about your cutting problem. We will advise you, make sample cuts for you and recommend the most suitable cutting tip for your application, also in special sizes.

Accessories - Horizontal adapter, 2 compartments

Description:

Simultaneous cutting of two grooves in rigid foam.

Groove spacing: center-to-center 50 mm
 Possible groove width: 10...20 mm
 Possible groove depth: 10...25 mm

Suitable for cutting tape 5x1.0 mm

Technical data:

Dimension B x L: 85x78 mm
 Weight: 0,24 kg

Scope of delivery:

1x Horizontal adapter, 2 compartments
 WITHOUT GROOVING BLADES

